

# C633BN

**Enduraflex™ black, soft/semi-hard/soft Tri-Bond™ natural rubber lining for field lining and repair. FDA compliant when Chemcure II™ is used to cure the rubber.**

## SPECIFICATIONS

**FACE MATERIAL DUROMETER, ATMOSPHERIC CURE:**  
45 to 65 A

**AVAILABLE GAUGES:**  
1/8", 3/16", 1/4", 4mm, 5mm, 6mm

**SKIVE:**  
Open

**REPAIRS:**  
Repair with original lining.  
See Section 16 – Repair Procedures.


## TYPICAL PHYSICAL PROPERTIES

Tensile Strength PSI	ASTM D412	1100
% Elongation at Break	ASTM D412	700
Durometer	ASTM D2240	58 A
Specific Gravity	ASTM D297	1.23
Adhesion to Metal	ASTM D429	25 LBS

Notes: For the best appearance of the completed rubber lining, always apply plastic side down against the substrate.

Chemcure II™ must be used in order to meet FDA requirements.

Caution: This lining is susceptible to deterioration by sunlight and oxygen. This is known as 'weather checking'. Do not expose rubber lining to sunlight, ozone or oxygen.

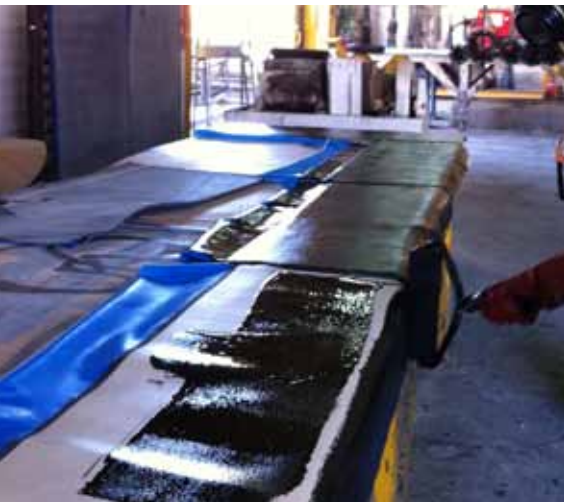

## CURE METHODS AND TIMES:

	Apply two coats of Chemcure™ or Chemcure II™ on lining face with approximately 60 minutes of drying time between coats. Cure approximately 14 days at room temperature.
Atmospheric	Exhaust Steam Assist: Gradually increasing the temperature to 160°F (71°C) for 8 to 12 hours by exhaust steam will result in an accelerated cure.
	Dry heat 20 hours at 120°F (49°C)

Note: Cure times may require adjustment to compensate for heavy metal thickness, low exterior temperatures or other unusual factors. See Section 14 – Curing Instructions.

# C633BN Enduraflex™ black, soft/semi-hard/soft Tri-Bond™ natural rubber lining for field lining and repair.

## STORAGE LIFE FROM DATE OF SHIPMENT

32°F (0°C) to 50°F (10°C)	180 days
51°F (13°C) to 65°F (19°C)	90 days
66°F (21°C) to 75°F (23°C)	60 days
76°F (24°C) to 85°F (30°C)	30 days

Storage temperature must not exceed 85°F (30°C).

## ADHESIVE SYSTEM ENDURABOND™ 1\*2\*3 SYSTEM

1st coat on metal:	Primer #1
2nd coat on metal:	Intermediate #2
3rd coat on metal:	Tack #3
On the rubber:	Tack #3 (rubber to metal) Chemcure™ or Chemcure II™ on the face of the rubber after installation. -See applicator notes that explain Chemcure™ or Chemcure II™ use.

\*Each adhesive component requires thorough mixing before application.

## APPLICATOR NOTES

- Used to repair Hotline II™ and other Tri-Bond™ natural rubber linings.
- Plying up layers of rubber lining thicker than ¼” could result in the rubber flowing or sagging during cure. Test plate is required to determine flow characteristics.
- Without the addition of heat, plying up layers of rubber lining could result in the rubber not curing thoroughly. Chemical curatives rarely penetrate two layers. An addition of 10% Chemcure by volume to the tack cement is recommended between layers of rubber (see note #6).
- The temperature of the substrate must be greater than 60°F (15°C) prior to applying primer and rubber. Temperatures should not exceed 120°F (49°C).
- Chemcure™ & Chemcure II™ should not be applied if rubber temperatures are below 50°F (10°C) or above 140°F (60°C). Note: at the low end the cure time may take months.
- Add 10% Chemcure™ by volume to the tack cement. Use this mixture wherever tack cement is required. This mixture has a pot life of approximately 6 hours.
- A heated table that warms rubber to approximately 120°F (49°C) is best for application.
- Strict adherence to adhesive specifications is required. Tack time is critical to the success of the bond.
- Apply two coats of Chemcure™ to the face of the rubber. Allow 60 minutes of drying time between applications.



## DISCLAIMER:

The above guidelines are based on general industry practices and not applicable to all installations. Please contact Blair Rubber Company for specific application instructions. Application methods shall conform to Blair Rubber Company instructions contained in the Engineering & Applicator manual. Deviations from the specifications must be approved in writing by Blair Rubber Company. Data values are approximate and may vary based on installation techniques and atmospheric conditions. As such, data values should be used as general guidelines and are not a legally binding warranty of product characteristics. This document is copyright to and the intellectual property of Blair Rubber Company and may not be copied or distributed without prior consent.